


THIS PRINT IS THE PROPERTY OF JASC AND REPRESENTS A PROPRIETARY ARTICLE TO WHICH JASC RETAINS THE EXCLUSIVE RIGHT OF USE AND/OR SALE. THIS PRINT IS DISCLOSED IN CONFIDENCE AND POSSESSION OF IT DOES NOT CONVEY PERMISSION TO MANUFACTURE THE ARTICLE OR ARTICLES SHOWN HEREIN. SUCH PERMISSION BEING GRANTED ONLY BY SPECIFIC AUTHORIZATION IN WRITING SIGNED BY AN OFFICER OF JASC.

REVISIONS			
REV	DATE	DESCRIPTION	BY
NC	10/8/09	INITIAL RELEASE	RPW

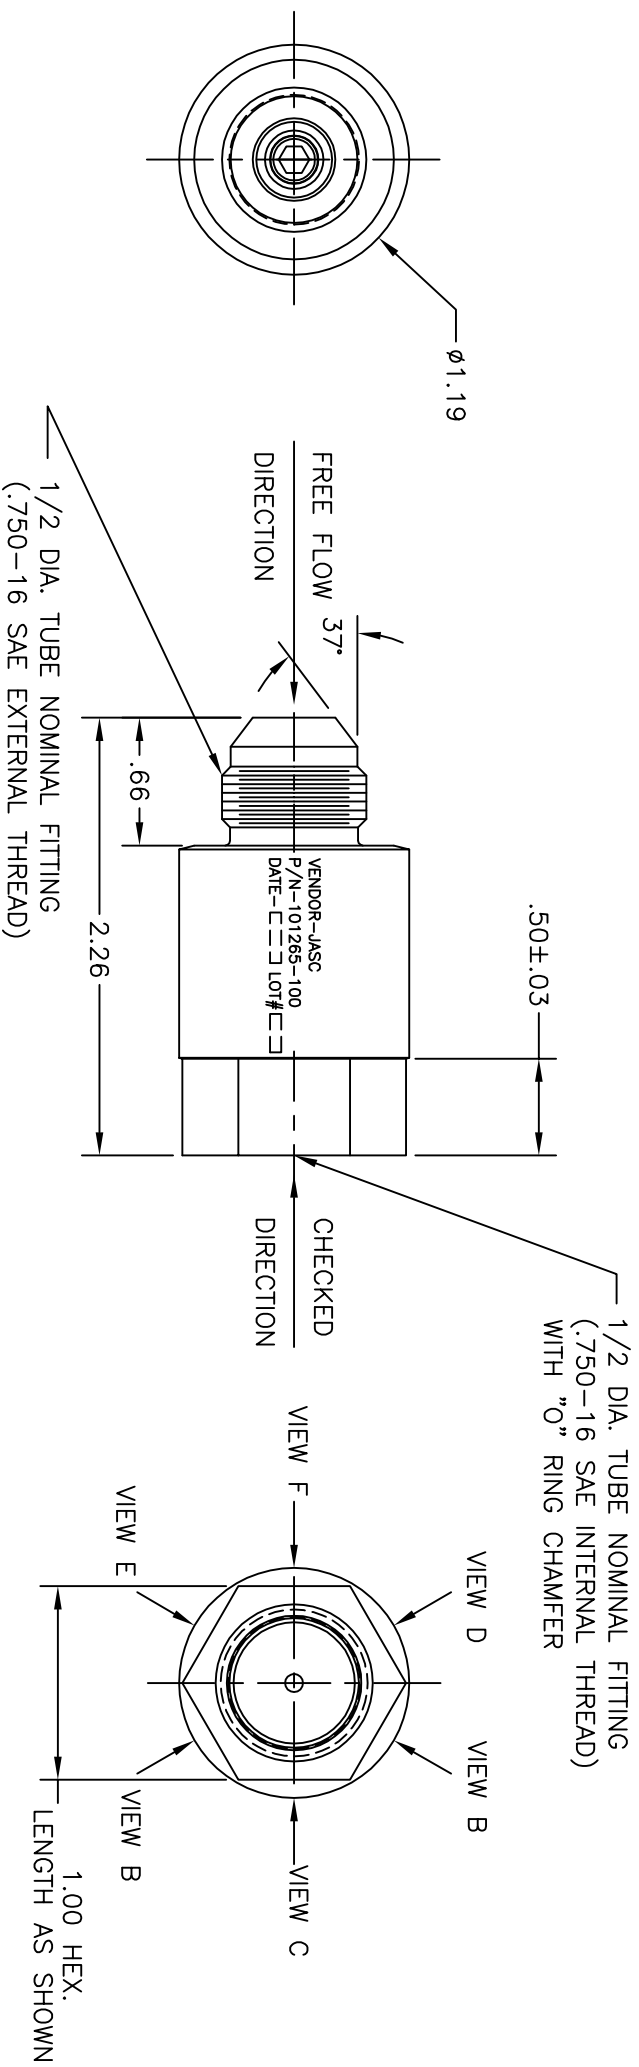

12. CONTAMINATION LEVEL : 75 MICRONS ABSOLUTE 98.67%
39 MICRONS OR LESS 4 mg/100ml
11. LEAKAGE IN CHECK DIRECTION : 1 CC/MIN. ON AIR OR NITROGEN
10. CRACK PRESS. : 1 PSID MAX.
9. PRESS. DROP TOLERANCE : 3 TO 5 PSID
8. MAXIMUM PRESS. DROP : 5 PSID
7. SOAK TEMP. : 700°F
6. MAXIMUM AMBIENT TEMP. : 400°F
5. CHECK PRESS. : 0 TO 1225 PSID
4. FLOW RANGE : 0 TO 0.060 LBS/SEC
3. INLET TEMP. : 0°F TO 300°F
2. INLET PRESS. : 0 TO 250 PSIG
1. THIS UNIT DESIGNED IN ACCORDANCE WITH
GE-PS SPECIFICATION 362A1331P002

NOTES: UNLESS OTHERWISE SPECIFIED

DIMS. APPLY AFTER PLATING BREAK SHARP EDGES .005 .015 MACHINED SURFACES .005-.020R MACHINED FILLETS	
FINAL	-
NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
SYMBOLS PER ANSI Y14.5
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± 1/64 .X ±.1 ±1°
.XX ±.010
.XXX ±.005
.XXXX±.0010

CONTRACT NO.	
APPROVALS	DATE
DRAWN RPW	10/07/09
CHECKED JFC	10/07/09

JASC®
Tempe, Arizona

TITLE: PURGE AIR CHECK VALVE

SIZE	CAGE	DWG. NO.
B	ΦR293	101265-100 OUTLINE

SCALE: 1:1 SHT 1 OF 1

101265-100 OUTLINE NC