




4

3

2

1

REVISIONS			
REV.	DATE	DESCRIPTION	BY
NC	10/30/2008	Initial Release	NVD

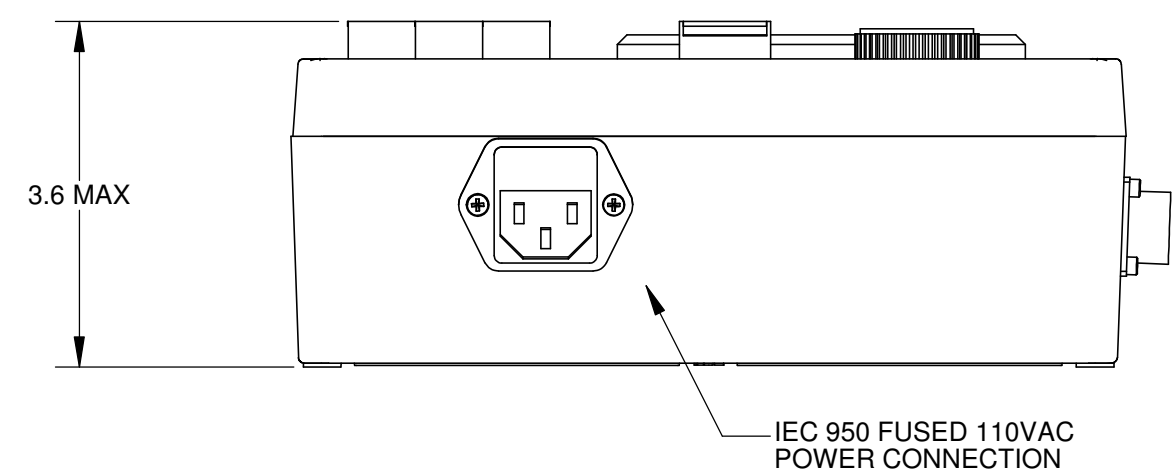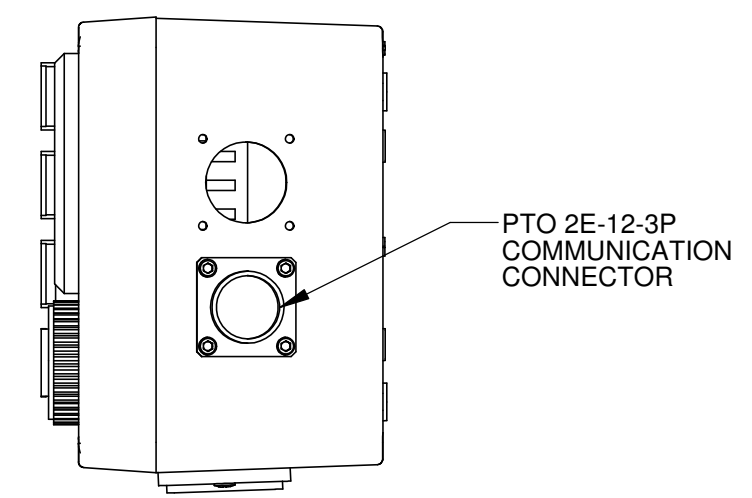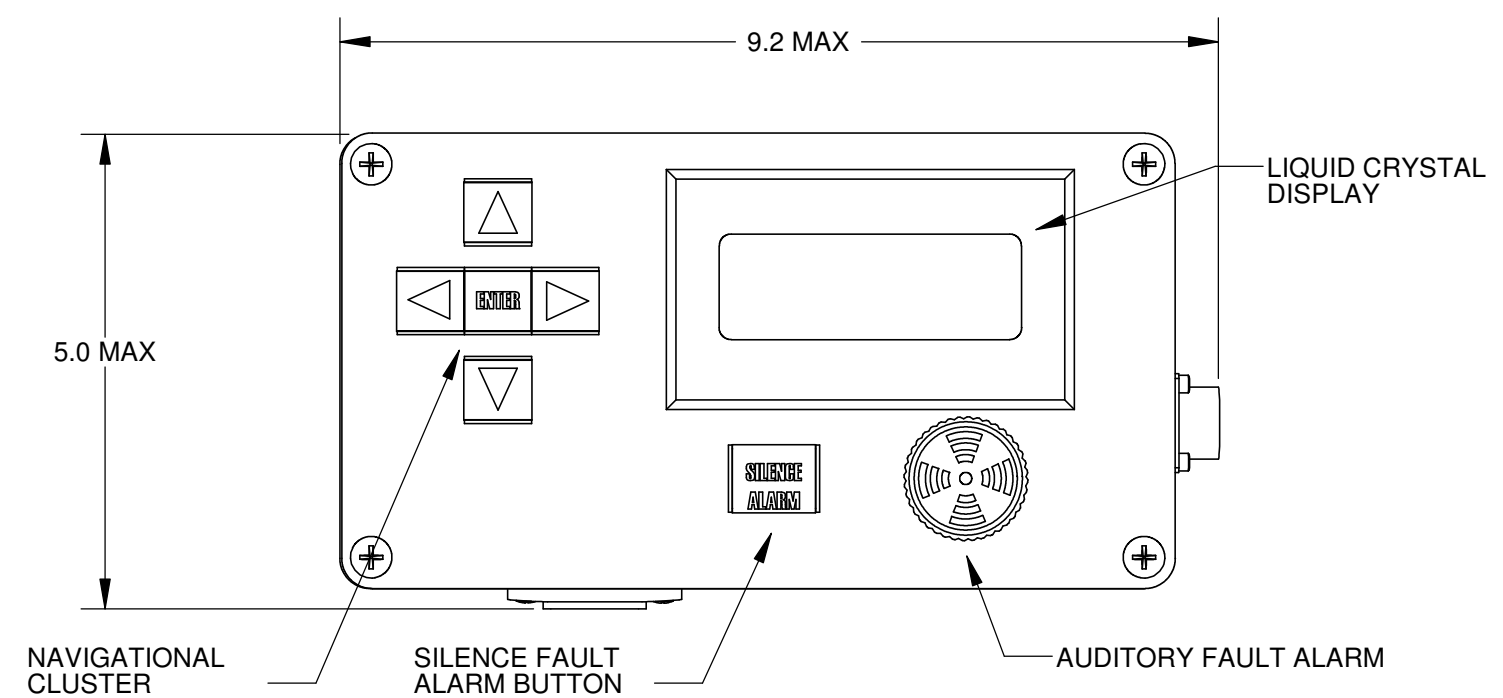


B

B

101490-1 OUTLINE NC

A

3. NOT EXPLOSION PROOF OR INTRINSICALLY SAFE
 2. POWER INPUT: 100 TO 240 VAC, 50 OR 60 HZ
 1. USED WITH 101483 SERIES SMART FLOW REMOTE SAFETY CONTROLLERS
 NOTES: UNLESS OTHERWISE SPECIFIED

THIS PRINT IS THE PROPERTY OF JASC AND REPRESENTS A PROPRIETARY ARTICLE TO WHICH JASC RETAINS THE EXCLUSIVE RIGHT OF USE AND/OR SALE. THIS PRINT IS DISCLOSED IN CONFIDENCE AND POSSESSION OF IT DOES NOT CONVEY PERMISSION TO MANUFACTURE THE ARTICLE OR ARTICLES SHOWN HEREIN: SUCH PERMISSION BEING GRANTED ONLY BY SPECIFIC AUTHORIZATION IN WRITING SIGNED BY AN OFFICER OF JASC.			 Tempe, Arizona		
DIMS. APPLY AFTER PLATING BREAK SHARP EDGES .005 .015 MACHINED SURFACES .005-.020R MACHINED FILLETS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES SYMBOLS PER ANSI Y14.5 TOLERANCES ARE: FRACTIONS DECIMALS ANGLES $\pm 1/64$.X $\pm .1$ $\pm 1^\circ$.XX $\pm .010$.XXX $\pm .005$.XXXX $\pm .0010$	CONTRACT NO.		TITLE:	
		APPROVALS	DATE	MASTER CONTROLLER, SMART FLOW	
FINAL	FINAL	DRAWN JJP	10/28/08	SIZE	CAGE
NEXT ASSY	USED ON	CHECKED HBJ	10/30/08	B	ØR293
APPLICATION				DWG. NO.	
				101490-1 OUTLINE	
		SCALE: 1:2		WEIGHT: 1.813lbs	SHT 1 OF 1

4

3

2

1