




4

3

2

1

| REVISIONS | | | |
|-----------|------------|-----------------|-----|
| REV. | DATE | DESCRIPTION | BY |
| NC | 10/30/2008 | Initial Release | NVD |

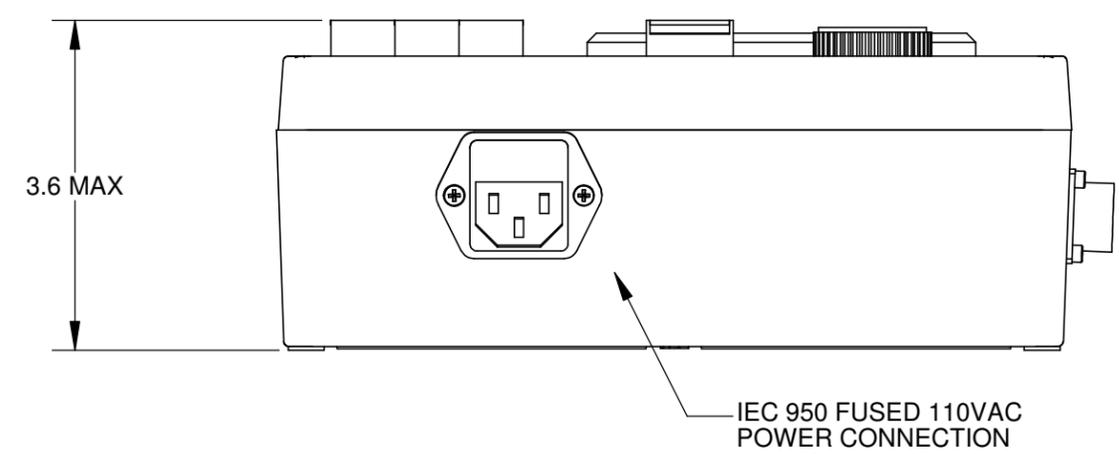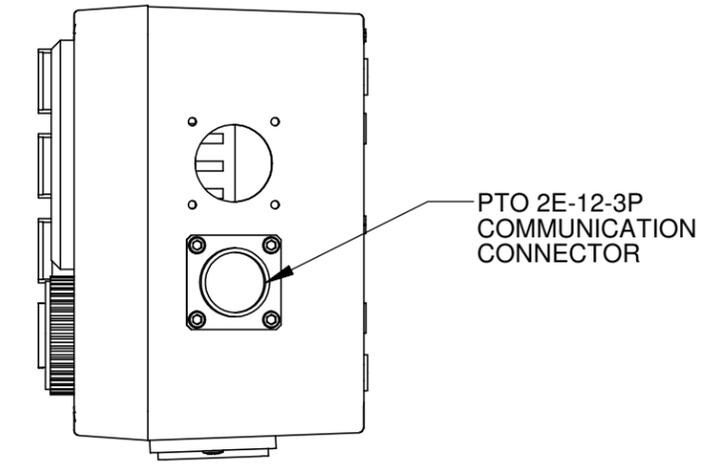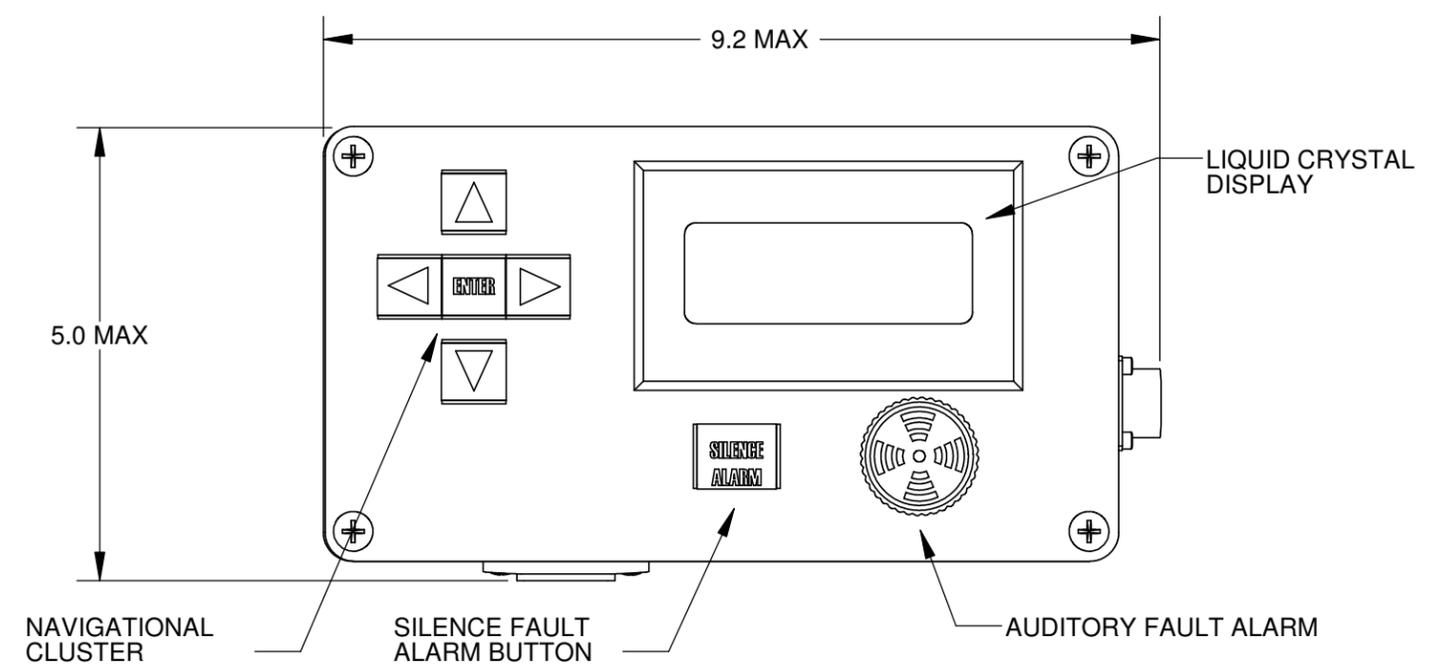

B

B

101490-1 OUTLINE NC

A

- 3. NOT EXPLOSION PROOF OR INTRINSICALLY SAFE
 - 2. POWER INPUT: 100 TO 240 VAC, 50 OR 60 HZ
 - 1. USED WITH 101483 SERIES SMART FLOW REMOTE SAFETY CONTROLLERS
- NOTES: UNLESS OTHERWISE SPECIFIED

THIS PRINT IS THE PROPERTY OF JASC AND REPRESENTS A PROPRIETARY ARTICLE TO WHICH JASC RETAINS THE EXCLUSIVE RIGHT OF USE AND/OR SALE. THIS PRINT IS DISCLOSED IN CONFIDENCE AND POSSESSION OF IT DOES NOT CONVEY PERMISSION TO MANUFACTURE THE ARTICLE OR ARTICLES SHOWN HEREIN: SUCH PERMISSION BEING GRANTED ONLY BY SPECIFIC AUTHORIZATION IN WRITING SIGNED BY AN OFFICER OF JASC.



Tempe, Arizona

| | | | | | |
|--|--|--------------|----------|-------------------------------|------------------|
| DIMS. APPLY AFTER PLATING BREAK SHARP EDGES .005 .015 MACHINED SURFACES .005-.020R MACHINED FILLETS | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES SYMBOLS PER ANSI Y14.5 TOLERANCES ARE: FRACTIONS DECIMALS ANGLES $\pm 1/64$.X $\pm .1$ $\pm 1^\circ$.XX $\pm .010$.XXX $\pm .005$.XXXX $\pm .0010$ | CONTRACT NO. | | TITLE: | |
| | | APPROVALS | DATE | MASTER CONTROLLER, SMART FLOW | |
| FINAL | FINAL | DRAWN JJP | 10/28/08 | SIZE | CAGE |
| NEXT ASSY | USED ON | CHECKED HBJ | 10/30/08 | B | ØR293 |
| APPLICATION | | | | DWG. NO. | |
| | | | | 101490-1 OUTLINE | |
| | | | | SCALE: 1:2 | WEIGHT: 1.813lbs |
| | | | | | SHT 1 OF 1 |

4

3

2

1